



A25B15


W x D x H
inch(mm)
15"(380) x 24.6"(625) x 33.7"(857)

Feature

- 69 lbs(31 kg) daily Ice production / 26 lbs(12 kg) Ice storage capacity
- Luxury & Compact Design with Powerful Performance
- Front Ventilation of Front in / Front out Air flow:
Space saving solution with Built-in type
- Simple & Easy to access Front Air filter for cleaning and maintenance
- Designed for easy installation and service
- Simple control, convenient, reliable and long lasting
- Power switch accessible without panel removal
- High reliability and low maintenance expense
- High density urethane foaming insulation keeps higher rigidity of the ice
- Includes ice scoop and adjustable legs
- 304 Durable Stainless steel Construction
- Unique Gourmet (bell) shape with Crystal-Clear & Slow-Melting
- UL approved for outdoor use
- Available with built-in drain pump
- R-134A Refrigerant


Dimensions

Dimensions	Net	Gross
Width	15"(380 mm)	18"(450 mm)
Depth	24.6"(625 mm)	27.4"(695 mm)
Height	33.7"(857 mm)	38.4"(975 mm)
Weight	104 lbs(47 kg)	119 lbs(54 kg)

Operating Limits

Ambient Temp Range	10 ~ 38 °C (50 ~ 100 °F)
Water Temp Range	10 ~ 32 °C (50 ~ 90 °F)
Water Pressure	20 ~ 80 psi (1.38 ~ 5.52 bar)
Voltage Range	±10% from regular voltage

Ice Dimension




GOURMET
32 x 36 x 34 (mm)
1¼ x 1⅜ x 1⅓ (inch)

Certification




ELEGANT DESIGN UNDERCOUNTER GOURMET ICE MACHINE


Dimension – Unit : mm(inch)

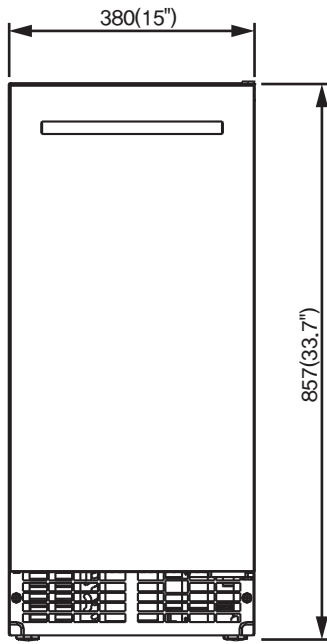

FRONT

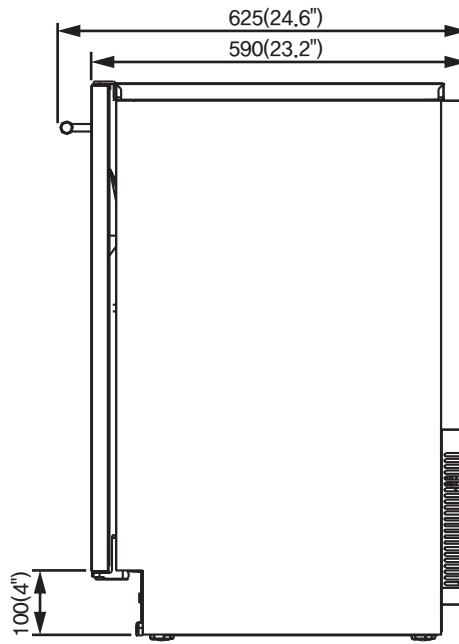

SIDE

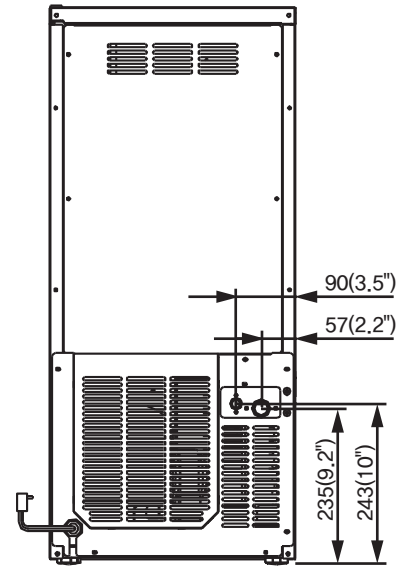

BACK

Specification

Model	Condenser	Ice Type	Ice Production 24 Hours		Power Consumption	Electrical Option	Water Usage gal/100 lbs. @90°/70°F (32°/21°C)	Power kWh/100 lbs. @90°/70°F (32°/21°C)	BTUs per hour
			Air/Water 21°C (70°F) / 10°C (50°F)	Air/Water 32°C (90°F) / 21°C (70°F)					
A25B15	Air-Cooled	GOURMET	69 lbs (31 kg)	59.52 lbs (27 kg)	500 W (±10 %)	208~230V/60Hz/1PH 220~240V/50Hz/1PH 115V/60Hz/1PH	24	11.15	1,600


Detail View



Easy to take out Ice by opening front door



Power switch at the bottom right when the door is opened

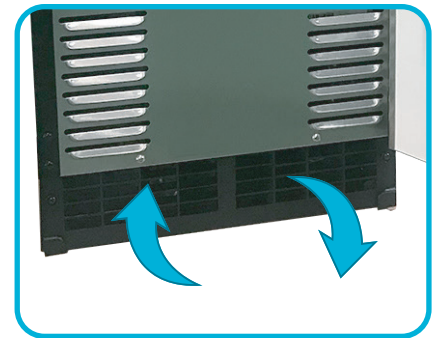

Front inlet/outlet with built-in construction enables optimal space utilization.

※ Design and Specification are subject to change without notice.