



Bradford

BakeryPro

MADE IN KOREA



Reliable power operation

Digital temperature controller adopted for easy temperature setting inside of the showcase with ability to select the defrost time setting for your best working conditions.

Anti-fog design

Paired glass (Double paned glasses) adopted for fog free glass and energy saving supported with ACAF system “air curtain anti-fog systems” for the front glass wall to boost fog resistance if necessary.

Customizable design and various product lines

You can also select various designs and colors for each different purpose showcases made of fortified glass. Moreover, we support various types of products following upon our customer demands such as Supermarket, Meat shop, Bakery & Coffee shop, convenient store and beverage display etc.



Series S

Square

Simple

Silent



Model	L/mm	H/mm	D/mm	Volts	Watt	Light	Temp
BF90-S	900	1240	650	220/60Hz	400	LED	Adjustable 3 – 10 C
BF120-S	1200				550		
BF150-S	1500				750		
BF180-S	1800				1000		
BF240-S	2400				1400		

The pictures shown in this catalogue can be different from real product.

Specifications of the product can be changed without prior notice, due to product upgrade or technical changes.

Series R

Round

Reliable

Robust



Model	L/mm	H/mm	D/mm	Volts	Watt	Light	Temp
BF90-R	900	1240	650	220/60Hz	400	LED	Adjustable 3 – 10 C
BF120-R	1200				550		
BF150-R	1500				750		
BF180-R	1800				1000		
BF240-R	2400				1400		

The pictures shown in this catalogue can be different from real product.

Specifications of the product can be changed without prior notice, due to product upgrade or technical changes.

Series O

Open

Optimum

Observable




Model	L/mm	H/mm	D/mm	Volts	Watt	Light	Temp
BF120-O	1200	1400	650	220	900	LED	Adjustable 3 – 10 C
BF150-O	1500				1300		
BF180-S	1800				1450		

The pictures shown in this catalogue can be different from real product.

Specifications of the product can be changed without prior notice, due to product upgrade or technical changes.

Series RX

Even
Deeper
Body

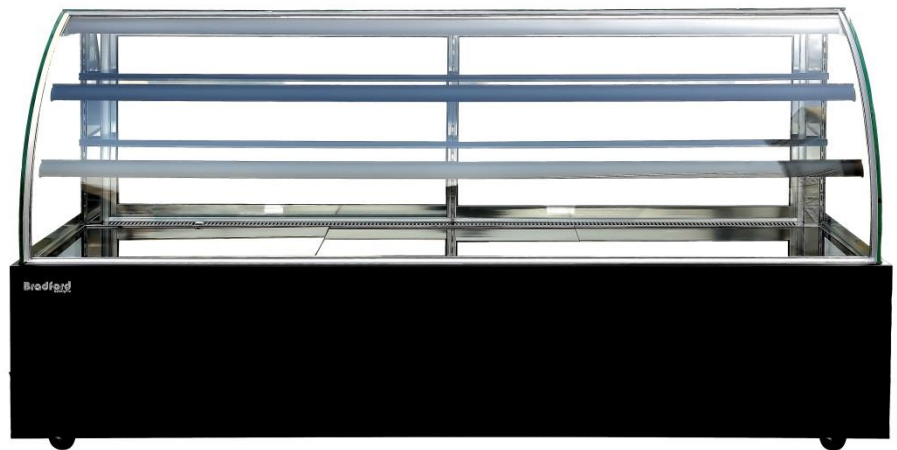

Model	L/mm	H/mm	D/mm	Volts	Watt	Light	Temp
BF120-S	1200	1240	900	220/60Hz	750	LED	Adjustable 3 – 10 C
BF150-S	1500				950		
BF180-S	1800				1050		
BF240-S	2400				1400		

The pictures shown in this catalogue can be different from real product.

Specifications of the product can be changed without prior notice, due to product upgrade or technical changes.