



IM-260AD(H, R)



W x D x H

inch(mm)

30"(762) x 24.8"(630) x 22.6"(573)

Feature

- 600 lbs(272 kg) daily Ice production
- Storage Bin Option : IBS-316(353 lbs / 160 kg)
& IBS-320(441 lbs / 200 kg)
- Designed for easy operation and service
- Easy access to food zone with removal of two screws
- Easy cleaning by Clean switch and Plastic food zone
- Easy maintenance by quick disassembling
- Power switch accessible without panel removal
- Simple control, convenient, reliable and long lasting
- Easy to check Power/Full Ice/ Check with Display Lamp
- High reliability and low maintenance expense
- High density urethane foaming insulation keeps
• higher rigidity of the ice
- Includes ice scoop and power cable
- 304 Durable Stainless steel Construction
- Three ice sizes to choose from Regular, Dice and Half Dice
- R-404A Refrigerant


Dimensions

Dimensions	Net	Gross
Width	30"(762 mm)	32.3"(845 mm)
Depth	24.8"(630 mm)	28.3"(720 mm)
Height	22.6"(573 mm)	28.3"(720 mm)
Weight	174 lbs(79 kg)	205 lbs(93 kg)

Operating Limits

Ambient Temp Range	10 ~ 38 °C (50 ~ 100 °F)
Water Temp Range	10 ~ 32 °C (50 ~ 90 °F)
Water Pressure	20 ~ 80 psi (1.38 ~ 5.52 bar)
Voltage Range	±10% from regular voltage

Ice Dimension



REGULAR
29 x 29 x 22 (mm)
1 1/8 x 1 1/8 x 7/8 (inch)



DICE
22 x 22 x 22 (mm)
7/8 x 7/8 x 7/8 (inch)




HALF DICE
9.5 x 29 x 22 (mm)
3/8 x 1 1/8 x 7/8 (inch)


Certification



Dimension – Unit : mm(inch)

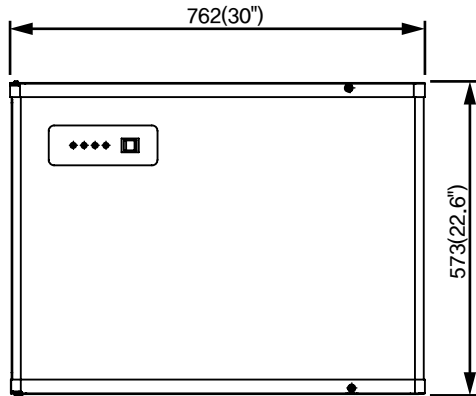


FRONT

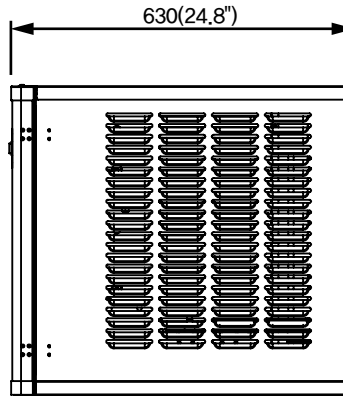

SIDE

A : Ice making Water Supply 3/8" NPT/PT
B : Water Drain 3/4" NPT/PT

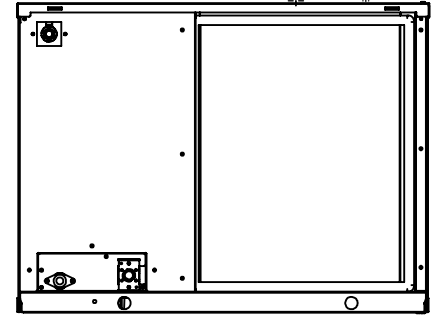

BACK

Specification

Model	Condenser	Ice Type	Ice Production 24 Hours		Power Consumption	Electrical Option	Water Usage gal/100 lbs. @90°/70°F (32°/21°C)	Power kWh/100 lbs. @90°/70°F (32°/21°C)	BTUs per hour
			Air/Water 21°C (70°F) / 10°C (50°F)	Air/Water 32°C (90°F) / 21°C (70°F)					
IM-260AR	Air-Cooled	REGULAR	600 lbs(272 kg)	474 lbs(215 kg)	1,250 W(±10 %)	208~230V/60Hz/1PH 220~240V/50Hz/1PH 115V/60Hz/1PH	19	6.19	5,200
IM-260AD		DICE							
IM-260AH		HALF DICE							

Detail View



Easy to check and control by the front display



Storage Bin Option :
IBS-316(353 lbs / 160 kg)
IBS-320(441 lbs / 200 kg)



Rear In / Both Side and Top Out Air flow

※ Design and Specification are subject to change without notice.