



IFI-770F / N



W x D x H

inch(mm)

22" (560) x 25" (645) x 26" (660)

Feature

- Flake – 728 lbs(330 kg) / Nugget – 692 lbs(314 kg) daily Ice production
- Storage Bin Option : IBS-210(221 lbs / 100 kg)
& IBS-212(265 lbs / 120 kg)
- Great solution for Food/Grocery/Beverage display,
Fish market, salad bar and cold therapy
/ healthcare by Flake Ice
- Rugged stainless steel evaporator and Auger ensures reliability
Space saving solution with Powerful Performance
- Designed for easy installation and service
- Automatic flush cycle for cleaner Ice
- Applied optimal drainage structure to prevent rust on the gear box
- Easy maintenance by quick disassembling
- Power switch accessible without panel removal
- Simple control, convenient, reliable and long lasting
- Easy to check Power/Full Ice/ Error with Display Lamp
- High reliability and low maintenance expense
- High density urethane foaming insulation keeps higher rigidity of the ice
- 304 Durable Stainless steel Construction
- R-404A Refrigerant

Dimensions

Dimensions	Net	Gross
Width	22" (560 mm)	26" (650 mm)
Depth	25" (645 mm)	30" (760 mm)
Height	26" (660 mm)	33" (835 mm)
Weight	185 lbs(84 kg)	207 lbs(94 kg)

Operating Limits

Ambient Temp Range	10 ~ 38 °C (50 ~ 100 °F)
Water Temp Range	10 ~ 32 °C (50 ~ 90 °F)
Water Pressure	20 ~ 80 psi (1.38 ~ 5.52 bar)
Voltage Range	±10% from regular voltage

Ice Type



FLAKE




NUGGET

Certification



MODULAR FLAKE / NUGGET ICE MACHINE

Dimension – Unit : mm(inch)

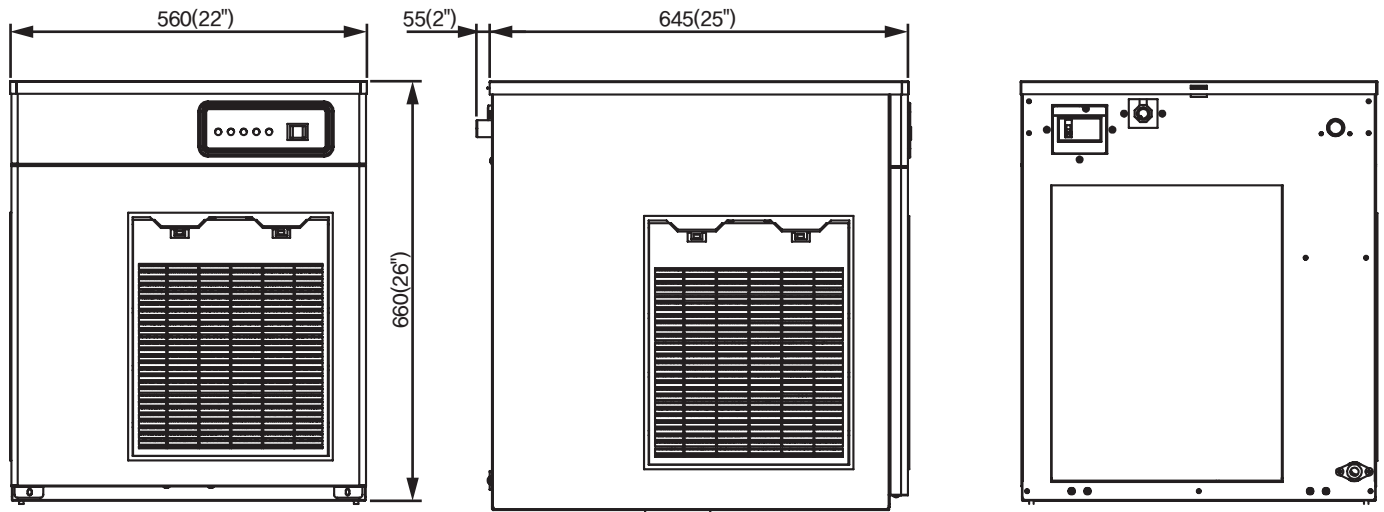

FRONT

LEFT-SIDE

BACK

Specification

Model	Condenser	Ice Type	Ice Production 24 Hours		Power Consumption	Electrical Option	Water Usage gal/100 lbs. @90°/70°F (32°/21°C)	Power kWh/100 lbs. @90°/70°F (32°/21°C)
			Air/Water 21°C (70°F) /10°C (50°F)	Air/Water 32°C (90°F) /21°C (70°F)				
IFI-770F	Air-Cooled	FLAKE	728 lbs(330 kg)	640 lbs(290 kg)	1200 W(±10 %)	208~230V/60Hz/1PH 220~240V/50Hz/1PH 115V/60Hz/1PH	12	5.87
IFI-770N		NUGGET	692 lbs(314 kg)	635 lbs(288 kg)				

Detail View



Easy to check and control by the front display



Storage Bin Option :
IBS-210(221 lbs / 100 kg)
IBS-212(265 lbs / 120 kg)



Front & Left In / Rear Out Air flow

※ Design and Specification are subject to change without notice.